

PIVOT-IN-FRAME DOORS

GUARANTEE

Kayo doors are made to the highest standards. Strength, durability, quality wood and manufacturing excellence ensure these doors are built to last.



3 All Pivot-in-frame doors are available in 1290mm (w) x 2115mm (h)

Our Pivot-in-frame solution saves time and money. These are delivered fully assembled, fitted with a stainless-steel barrel lock and wrapped in plastic for protection.

PIVOT-IN-FRAME HARDWOOD DOORS



S Symphony DIFCDSPNHSOP/1.2 1290 X 2115



S Lion M DIFCDLIOHSOP/1.2 1290 X 2115



S Elephant M DIFCDELPHSOP/1.2 1290 X 2115



S Rhino M DIFCDRHNHSOP/1.2 1290 X 2115



S Buffalo M DIFCDBFLHSOP/1.2 1290 X 2115

All stiles and rails are engineered. Core construction includes SA Pine. Wood is a natural product and colour variations may occur.

CRAFTED HARDWOOD DOORS



Symphony M CDSPNHSO M CDLIOHSO 813 X 2O32

813 X 2032

S Rhino

S Elephant M CDELPHSO M CDRHNHSO M CDBFLHSO 813 X 2032

S Buffalo 813 X 2032 813 X 2O32

DOUBLE-BOARDED BATTEN DOORS



S Horizontal Slatted KYD61 813 X 2032



S Horizontal Slatted KYD61S/OI 813 X 2032

DOOR APPLICATION GUIDELINES							
(E) Exterior	Semi-Exterior	1 Interior	Fire-Resistant	Usage			
Frequent exposure to unprotected open-air conditions. Please be aware that an over-hang above the door is recommended.	Infrequent and partial exposure to unprotected open-air conditions. Do not expose to direct sunlight or rain. Please be aware that an over-hang above the door is a requirement.	Exposed to dry, sheltered (indoor) conditions only. Internal use only.	Fire-resistant doors forms part of a Class E fire-rating system. (30 minutes)	Light Duty (Domestic / Interior usage) Medium Duty (Domestic /			
Treatment: Seal all 6 sides with a water- based sealant, including beading and rebates. Re-seal after trimming.	Treatment: Seal all 6 sides with a water- based sealant, including beading and rebotles. Re-seal after trimming.	Treatment: Seal all 6 sides with a water- based sealant, including beading and rebates. Re-seal after trimming.	Treatment: Seal all 6 sides with a water- based sealant, including beading and rebates. Re-seal after trimming.	Heavy Duty (Frequent / Security usage)			

All stiles and rails are engineered. Core construction includes SA Pine. Wood is a natural product and colour variations may occur.





Back

PANEL HARDWOOD DOORS



GUARANTEE

5 Panel KYD5F 813 X 2032

8 Panel

Stable

KYD8SF

813 X 2032



S 6 Panel Colonial S 6 Panel Equal M KYD6F 813 X 2O32



M KYD6EF 813 X 2O32



3 8 Panel Colonial M KYD8F 813 X 2032



10 Panel Colonial 813 X 2032



12 Panel Colonial KYD12F 813 X 2032



12 Panel Stable KYD12 813 X 2032

FACE-BOARDED BATTEN DOORS



Framed KYD2155H 813 X 2O32



Framed M KYD2156H 813 X 2032



Framed & Ledged M KYD2117H 813 X 2O32



Framed, Ledged & Braced 3 M KYD2117HZ 813 X 2032



Framed, Ledged & Stable 3 0 KYD2118H 813 X 2032

PLANT ON ENTRANCE DOORS



S Kalahari Sun KYD]OO KYD100S/OI



M KYD101 KYD101S/OI



African Shield KYD1O4



8 Intertwined M KYD105





8

M

TRADITIONAL FRAME AND LEDGED **BATTEN DOORS**



S Framed & Ledged KYD1/OB 813 X 2032



M



Braced KYD1/OB/BR 813 X 2032



S Plyback ■ KYD1/PB 813 X 2032



0 Framed, Ledged & Stable KYDIS/OB



813 X 2032



9 Braced 0 KYDIS/OB/BR 813 X 2032



0 KYDIS/PB 813 X 2032

All stiles and rails are engineered. Core construction includes SA Pine. Wood is a natural product and colour variations may occur.

All stiles and rails are engineered. Core construction includes SA Pine. Wood is a natural product and colour variations may occur.





HOW TO HANG A BRACED DOOR

Make sure the brace is facing upwards from the fixed hinges, and that the lockset is fitted to the opposite side of the brace.



FACE-BOARDED BATTEN DOORS

813 X 2032



Battened PNKYD2113 PNKYD2116 813 X 2032 / 680 X 1800

Back

Battened & Stable PNKYD2115 813 X 2032

DIPPED PINE

PANEL DOORS

DOUBLE-BOARDED **BATTEN DOORS**



Pine **■** PNKYD2155 A 813 X 2032

Pine Stable

■ PNKYD2156 M 813 X 2032



S PNKYD8F M 813 X 2032



S PNKYD8SF M 813 X 2032

All stiles and rails are engineered. Core construction includes SA Pine. Wood is a natural product and colour variations may occur.

PINE PANEL AND PRE-GLAZED DOORS



FACE-BOARDED FRAMED AND LEDGED **BATTEN DOORS**



PNKYD2117 M PNKYD2117Z 813 X 2032 813 X 2O32

FACE-BOARDED FRAMED AND LEDGED STABLE DOORS





All stiles and rails are engineered. Core construction includes SA Pine. Wood is a natural product and colour variations may occur.



www.swartland.co.za www.swartland.co.za



KAYO FRONT & BACK PINE



INTERIOR DEEP MOULDED DOORS



- Classique ● EBCSSLIO ❶ EBCSSLI0762
- @ EBCSSHS0




- Cantebury EBCTBLIO
- EBCTBLI0762 ■ EBCTBHS0 0 EBCTBFS0



- Colonist ■ EBCLNLIO ■ EBCLNLI0762
- EBCLNHS0 EBCLNFS0

- Elegance
- EBELGLIO ■ EBELGLI0762
- # EBELGHSO
- EBELGFS0



BERGSUN DOORS



Imbali M BSIBLMSO



8 Panel Arched M BSEPAMS0



Ruby M BSRBYMSO



Melody **M** BSMLDMS0



Traditional M BSTDTMS0



Sebastian M BSSBTMSO



Vertical M BSVTCMS0 **BSVTCMS0SB**



- Commercial **M**BSHRZMS2 (also in 762)
- **6** BSHRZFS2 **BSHRZLIO**

All stiles and rails are engineered. Core construction includes SA Pine. Wood is a natural product and colour variations may occur.

INTERIOR PRINTED DOORS



INTERIOR VENEER & HARDBOARD DOORS



PRSAPLI0762

 Commercial Veneer VNCOMLIO **W** VNCOMMI2 **(6)** VNCOMFS2 VNCOMSSI0

VNCOMSSI2

Sapele Veneer UNSAPLIO

M VNSAPMI2 **W**VNSAPFS2 VNSAPSSI0 **VNSAPSSIO**



Horizontal Hardboard
Standard Hardboard HBHRZLIO HBSTDLIO (I) HBHR2FS0 M HBSTDMI2

HBSTDHI2 **❸** HBSTDFS0 HBSTDSS10 HBSTDSS12

Front

COMMERCIAL VENEER DOORS ercial light-duty interior door with exposed edges ercial light-duty interior door with 1 exposed hardwood edge VNCOMLI1 VNCOMLI2 813X2O32 2HE Commercial light-duty interior door with 2 exposed hardwood edges Commercial light-duty interior door with 1 exposed hardwood edge VNCOMLI1762 VNCOMMI2 Commercial medium-duty interior door with 2 exposed hardw Commercial fire door with 2 exposed hardwood edgess VNCOMFS2 0 VNCOMSSIO Commercial semi-solid door with exposed edges Commercial semi-solid door with 2 exposed hardwood edges VNCOMSSI2

0

	SAFEEE VENEER BOOKS				
u	Product Code	Section Sizes	Description		
	VNSAPLI0	813X2O32 EE	Sapele light-duty interior door with exposed edges		
	VNSAPLI0762	70272302 EE Superior agric docy interior door with exposed edges			
	VNSAPLI1	813X2O32"1HE	Sapele light-duty interior door with 1 exposed hardwood edge		
	VNSAPLI2	2 813X2O32 2HE Sapele light-duty interior door with 2 exposed hardwood edges			
	VNSAPMI2	813X2O32 2HE	Sapele medium-duty interior door with 2 exposed hardwood edges		
	VNSAPFS2	VNSAPFS2 813X2O32 2HE Sapele fire door with 2 exposed hardwood edges 🚯			
	VNSAPSSIO 813X2O32 EE Sapele semi-solid door with exposed edges				
	VNSAPSSI2	813X2O32 2HE	Sapele semi-solid door with 2 exposed hardwood edges		

VNSAPSS12	813X2O32 2HE	Sapele semi-solid door with 2 exposed hardwood edges						
INTERIOR HARDBOARD DOOR CODES								
Product Code	Section Sizes	Description						
HBSTDLIO HBSTDLIO762 HBSTDLIO762 HBSTDMI2 HBSTDMI2762 HBSTDHI2 HBSTDSSIO HBSTDSSIO HBHRZLIO HBSTDFSO HBHRZFSO	813 X 2032 EE 762 X 2032 EE 813 X 2032 EE 813 X 2032 2HE 813 X 2032 2HE 813 X 2032 2HE 813 X 2032 EE 813 X 2032 EE 813 X 2032 EE 813 X 2032 EE	Standard light-duty interior door with exposed edges Standard light-duty interior door with exposed edges Standard light-duty interior door with exposed edges Standard medium-duty interior door with 2 exposed hardwood edges Standard medium-duty interior door with 2 exposed hardwood edges Standard heavy-duty interior door with 2 exposed hardwood edges Standard semi-solid, interior door with 2 exposed hardwood edges Standard semi-solid, interior door with 2 exposed edges Standard semi-solid, interior door with 2 exposed edges Standard semi-solid, interior door with exposed edges Standard heavy duty fire door with exposed edges Standard heavy duty fire door with exposed edges Standard heavy duty fire door with exposed edges						
Code	Description							
EE 1HE 2HE	1 Exposed hardv	rtical door edges vood vertical door edge wood vertical door edges						

Fire-resistant doors form part of a Class E fire-rating system. (30 minutes)

All stiles and rails are engineered. Core construction includes SA Pine. Wood is a natural product and colour variations may occur.


www.swartland.co.za www.swartland.co.za

KAYO DOOR FRAMES RANGE							
HARDWOO	HARDWOOD DOOR FRAMES			PINE DOOR FRAMES			
Product Code	Product Code Section		Product Code	Section	Door Size		
KKYFD1/NS	60 X 38	813mm	KPNKYFD1/NS	67 X 44	813mm		
KYFD1/NS	60 X 38	813mm	PNKYFD1/NS	67 X 44	813mm		
KKYFC1/NS	76 X 53	813mm	KPNKYFD1/NS/W	67 X 44	813mm		
KKYFC1/OI	76 X 53	813mm	PNKYFD1/NS/W	67 X 44	813mm		
KKYFC1/OO	76 X 53	813mm	KPNKYFB1/NS	80 X 44	813mm		
KYFC1/NS	76 X 53	813mm	PNKYFB1/NS	80 X 44	813mm		
KYFC1/OI	76 X 53	813mm	KPNKYFB1/NS/W	80 X 44	813mm		
KYFC1/OO	76 X 53	813mm	PNKYFB1/NS/W	80 X 44	813mm		
KKYFB1/NS	76 X 38	813mm					
- KKYFB1/OI	- KKYFB1/OI 76 X 38		HARDWOOD DOOR FRAMES				
KKYFB1/OO	76 X 38	813mm	WITH SIDE LIGHT				
KYFB1/NS	76 X 38	813mm	D 1 10 1	Section	Door Size		
KYFB1/OI	76 X 38	813mm +	Product Code	Section	Door Size		
KYFB1/OO	76 X 38	813mm	KKYSLF1L/NS	76 X 51	813mm		
	86 X 67	813mm	KYSLF1L/NS	76 X 51	813mm		
	86 X 67	813mm	KKYSLFIR/NS	76 X 51	813mm		
	86 X 67	813mm	KYSLFIR/NS	76 X 51	813mm		
	86 X 67	813mm	KKYSLF4/NS	76 X 51	813mm		
	86 X 67	813mm	KYSLF4/NS	76 X 51	813mm		
	86 X 67	813mm					


Door frames can be delivered knock-down in kit form (Unassembled), e.g. KKYFD1/NS, to save on storage and transport costs, or assembled e.g. KYFD1/NS.

Always use KAYO door frames with KAYO doors. Please be aware that other manufacturers' rebate sizes may differ from Kayo and will not match Kayo doors.

SIDE LIGHT DOOR FRAMES

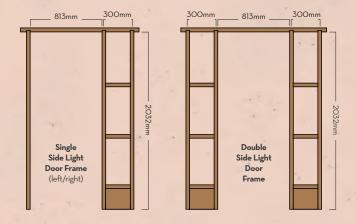

RECOMMENDED DOOR THICKNESS



NOTE: We recommend a door thickness of 38-40mm for the KAYO door frame range.

For detailed product specifications please visit www.swartland.co.za

HANDLING


All products must be stored off the ground in a dry, well-ventilated area and kept out of direct sunlight. All surfaces in direct contact with walls or concrete must be sealed with a coat of water-based sealant.

DOOR INSTALLATION



TRIMMING SPECS

Drawing for internal doors.



Maximum trim allowed: RAIL ≤ 105 = 12mm STILES 5mm per side

